500 Watts

AC-DC ITE & Medical Switching Power Supply



**MQF500E SERIES** 

# **KEY FEATURES**

- Enclosed Medical Switching Power Supply
- Remote ON/OFF Function
- Standby 5V@1A
- High Efficiency up to 92%
- With P.F.C. Function >0.94
- Ultra Compact Size: 5.5 x 3.25 x 2.48 Inches
- 3-Year Product Warranty





## **ELECTRICAL SPECIFICATIONS**

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.		MQF500E-12S	MQF500E-15S	MQF500E-24S	MQF500E-48S	
Max Output Wattage (W)		500 W				
	Voltage	90-264 VAC or 127-370 VDC				
Input	Frequency (Hz)	47-63 Hz				
	Current (Full load)	<6.3 A max. (115 VAC) / <3.15 A max. (230 VAC)				
	Inrush Current (<2ms) (Clod Start)	< 40 A max. (115 VAC) / < 80 A max. (230 VAC)				
	Leakage Current	< 0.1 mA max. (Input-Output)				
	Power Factor (at 230 VAC)	PF>0.94 at Full Load				
	Voltage (V.DC.)	12V	15V	24V	48V	
	Voltage Accuracy	±2%				
	Voltage Adj. Range (V.DC)	±4% Output Voltage	9			
	Current (A) (max.)	41.5	33.3	20.8	10.41	
Output	Line Regulation (115-264 VAC)	±0.5%			•	
	Load Regulation (10-100%) (typ.)	±1%				
	Minimum Load	3%				
	Maximum Capacitive Load	5,000µF	3,750µF	2,500µF	1,250µF	
	Ripple & Noise (typ.)	160mV	160mV	240mV	480mV	
	Efficiency (at 230 VAC)	89%	89%	91%	92%	
	Hold-up Time (at 115 VAC)	8 ms min.				
	Over Power Protection	Auto recovery				
	Over Voltage Protection	Auto recovery				
Protection	Overt Temperature Protection	Auto recovery				
	Oh ant O'reacht Dealaction	Protection level 1 (nominal) : Continuous, Auto recovery				
	Short Circuit Protection	Protection level 2 (instantaneous high current) : Latch				
	Input-Output (V.AC)	4000VAC or 5656VDC				
Isolation	Input-PE (V.AC)	2000V				
	Output-PE (V.AC)	1500V				
	Operating Temperature	-30°C+70°C (with derating)				
	Storage Temperature	-35°C+85°C				
Environment	Temperature Coefficient	±0.03%/°C(0~50°C)				
		±0.06%/°C (-30~0°C )				
	Altitude During Operation	5000m				
	Humidity	95% RH				
	Atmospheric Pressure	56 kPa to 106 kPa				
	MTBF	>160,000 h @ 25°C (MIL-HDBK-217F)				
	Vibration	10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes.				

AC-DC ITE & Medical Switching Power Supply



**MQF500E SERIES** 

500 Watts


## **ELECTRICAL SPECIFICATIONS**

Model No.		MQF500E-12S	MQF500E-15S	MQF500E-24S	MQF500E-48S
Dimension (L x W x H) 5.5 x 3.25 x 2.48 Inches (139.7 x 82.55 x 62.9 mm) Tol		5 x 62.9 mm ) Tolerai	nce $\pm 0.5$ mm		
Physical	Weight 690 g				
0-1-1-	Approval	Others: UL / IEC / EN 60601 3.1rd Edition & UL / IEC / EN 60950 AM2			
Safety		15S: UL / IEC / EN 60601 3.1 <sup>rd</sup> Edition (In Progress)			
FMC	Conducted and Radiated EMI	EN55011 / conducted class B, Radiated Class A			
EMC	EMS	EN60601-1-2 4th edition			

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated

## NOTE


1. Ripple & Noise are measured at 20MHz of bandwidth with ceramic 0.1uF & chemi-con KY 47uF parallel capacitor.

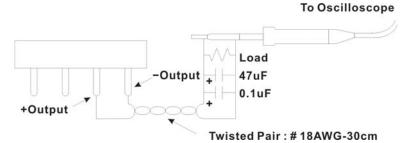


A 30cm twisted pair of no.18 AWG copper wire is connected to a 47uF and 0.1uF capacitor of proper polarity and voltage rating. The oscilloscope probe ground led should connect right to the ground ring of the probe and be as short as possible. The oscilloscope bandwidth should be at 20MHz and connected to AC ground.

- 2. Hold-up Time measured at 90% Vout.
- 3. Main Vout >3% Load, 12V (Aux) / 0.3A., 12V (Aux) need 0.1A Minimum Load, Auxiliary voltage output ground 10.2~13.3V
- 4. Strongly recommend to conduct this test with DC Voltage. If customer wishes to test with AC Voltage, please disconnect all Y-Capacitors within Arch power supply.

## DERATING










**MQF500E SERIES** 

# MECHANICAL DIMENSION (Top View)

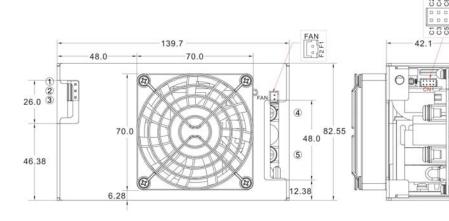



A=For fixture to din rail clip only B=For fixture to pcb/chassis only A=M3x0.5P B=M3x0.5P



### ASSEMBLY INSTRUCTIONS

\*U Case T=1.5mm

Customer is advised to screw into the threads no more than 2.5mm

PIN#	Single	Mating Housing	Terminal	
А	PE			
AC Input Connector Pin : Alex 9397-3				
1	AC IN (N)	Alox 0206 2	Alex 96T Series	
2	NO PIN	Alex 9396-3 or equivalent	or equivalent	
3	AC IN (L)	or equivalent	or equivalent	
DC Output Connector Pin				
4	+DC OUT	M5 Pan HD screw in 2 positions		
5	-DC OUT	Torque to 8 lbs-in(90 cNm) max.		

Connect	Connector Pin (CN1) = Cherng Weei PHD2.0 - 2x4P				
PIN#	Single	Mating Housing	Terminal		
C1	-5VSB				
C2	+5VSB				
C3	GND	Oh ann a M(a a'	Ohanna Miraci		
C4	DC OK	Cherng Weei	Cherng Weei		
C5	-RC	PHD2.0 - 2x4P		PHD2.0 - 2x4P	
C6	+RC	or equivalent	or equivalent		
C7	-S				
C8	+S				

Connector Pin (FAN) = Cherng Weei CX-W250-02			
PIN#	Single	Mating Housing	Terminal
F1	+12V	Cherng Weei	Cherng Weei
F2	GND	CS-H250-02	CS-T2501
		or equivalent	or equivalent

500 Watts




### **FUNCTION DESCRIPITON of CN1**

Pin No.	Function	Description
C1	-5VSB	This pin connects to the negative terminal(-V). Return for DC-OK and -RC signal output.
C2	+5VSB	Stand by voltage output ground 4.2~5.5V, referenced to pin C1(-5VSB). The maximum load current is 1A with Fan, 0.4A without Fan
C3	GND	This pin connects to the negative terminal(-V). Return for DC-OK and -RC signal output.
C4	DC OK	DC-OK Signal is a DC output, referenced to pin C3(DC-OK GND).
C5	-RC	This pin connects to the negative terminal(-V). Return for DC-OK and -RC signal output.
C6	+RC	Turns the output on and off by electrical or dry contact between pin C5 (-RC), Short: Power OFF, Open: Power ON. The input voltage must be less than 1V in order to disable VOUT and greater than 3.3V (up to 5V) to enable it.
C7	-S	Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect.
C8	+S	Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect.

# **FUNCTION MANUAL & APPLICATION NOTE**

### 1. DC-OK Signal

Between DC-OK and GND	Output Status
3.7~6V	ON
0~1V	OFF

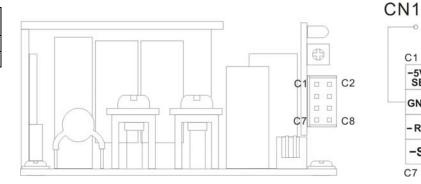

Ð G C1 C2 -5V SB +5V SB DC OK GND -RC +RC


> -S +S

> > C8

C7

#### 2. Remote Control

It can be turned ON/OFF by using the "Remote Control" function.

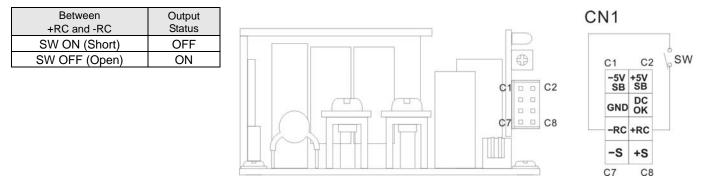

### 2. +S and -S Sense

Shorter wiring to each unit is recommended, as well as twisting +S and -S in pairs, as shown below



**BLOCK DIAGRAM** 

## **MQF500E SERIES**



