



P-DUKE POWER


LCD10W Series

DC-DC Converter
Up to 10 Watts

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

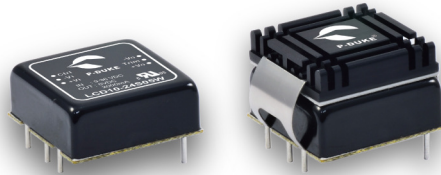

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

c

1600
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

6
sided
Shielding

Internal
EN55032
Class
Filter **B**

LOW
Standby
Power

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

OVP

SCP

UVP

PART NUMBER STRUCTURE

LCD10	-	48	S	05	W	-	A	HC
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Remote ON/OFF & Trim Option	Assembly Option
		24:9~36 48:18~75	S:Single D:Dual	3P3:3.3 05:5 12:12 15:15 24:24 05:±5 12:±12 15:±15	4:1		<input type="checkbox"/> :Negative logic A :Positive logic B :Without Ctrl pin C :Negative logic without Trim pin D :Without Ctrl & Trim pin E :Positive logic without Trim pin	<input type="checkbox"/> : None HC : Heat-sink with Clamp

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
LCD10-24S3P3W	9 ~ 36	3.3	3000	6	85	3500
LCD10-24S05W	9 ~ 36	5	2000	6	87	2500
LCD10-24S12W	9 ~ 36	12	830	6	90	430
LCD10-24S15W	9 ~ 36	15	670	6	91	350
LCD10-24S24W	9 ~ 36	24	416	6	90	125
LCD10-24D05W	9 ~ 36	±5	±1000	6	87	±1440
LCD10-24D12W	9 ~ 36	±12	±416	6	89	±250
LCD10-24D15W	9 ~ 36	±15	±333	6	89	±180
LCD10-48S3P3W	18 ~ 75	3.3	3000	4	85	3500
LCD10-48S05W	18 ~ 75	5	2000	4	87	2500
LCD10-48S12W	18 ~ 75	12	830	4	90	430
LCD10-48S15W	18 ~ 75	15	670	4	90	350
LCD10-48S24W	18 ~ 75	24	416	4	90	125
LCD10-48D05W	18 ~ 75	±5	±1000	4	87	±1440
LCD10-48D12W	18 ~ 75	±12	±416	4	89	±250
LCD10-48D15W	18 ~ 75	±15	±333	4	89	±180

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom)	9	24	36	VDC
	48Vin(nom)	18	48	75	
Start up voltage	24Vin(nom)			9	VDC
	48Vin(nom)			18	
Shutdown voltage	24Vin(nom)	7.5	8	8.8	VDC
	48Vin(nom)	15.5	16	17.5	
Start up time	Constant resistive load	Power up		30	ms
		Remote ON/OFF		30	
Input surge voltage	1 second, max.	24Vin(nom)		50	VDC
		48Vin(nom)		100	
Remote ON/OFF	Referred to -Vin pin	Positive logic DC-DC ON (Option)		Open or 3 ~ 15VDC	mA
		Negative logic DC-DC ON (Standard)		Short or 0 ~ 1.2VDC	
		Input current of Ctrl pin	-0.5	1.0	mA
		Remote off input current		2.5	mA

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Output power	Output voltage trimmed up 10%				11	W
	Output voltage trimmed up 20%				12	
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load					%
		Single	-0.2		+0.2	
		Dual	-0.5		+0.5	
Load regulation	No Load to Full Load				+0.2	%
		Single	-0.2		+0.2	
		Dual	-1.0		+1.0	
	10% Load to 90%Load				+0.1	
		Single	-0.1		+0.1	
		Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL				+5.0	%
Voltage adjustability	Single output				+10	%
		3.3Vout, 12Vout Others	-10 -10		+20	
Ripple and noise	Measured by 20MHz bandwidth With a 10µF/25V X7R 1206 MLCC			40		mVp-p
		3.3Vout, 5Vout 12Vout, 15Vout		60		
		24Vout		60		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection						VDC
		3.3Vout	3.7		5.4	
		5Vout	6.3		7.4	
		12Vout	13.5		19.6	
		15Vout	18.3		22.0	
		24Vout	29.1		32.5	
Over load protection	% of Iout rated; Hiccup mode			150		%
Short circuit protection			Continuous, automatic recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output Input(Output) to Case	1600 1000			VDC
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					1500	pF
Switching frequency			297	330	363	kHz
Safety approvals	IEC /UL/ EN60950-1				UL:E193009 CB:UL(Demko)	
Case material					Copper	
Base material					FR4 PCB	
Potting material					Epoxy (UL94 V-0)	
Weight					16.5g (0.58oz)	
MTBF	MIL-HDBK-217F, Full load				3.376 x 10 ⁶ hrs	

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating With derating		-40 +81		+81 +105	°C
Maximum case temperature					105	°C
Storage temperature range			-55		+125	°C
Thermal impedance	Without heat-sink With heat-sink			16.18 15.13		°C/W
Thermal shock					MIL-STD-810F	
Vibration					MIL-STD-810F	
Relative humidity					5% to 95% RH	

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55032 Without external components	Class A
	With external components	Class B
ESD	EN61000-4-2 Air $\pm 8kV$ and Contact $\pm 6kV$	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 $\pm 2kV$	Perf. Criteria A
	With an external input filter capacitor (Nippon chemi-con KY series, 220 μ F/100V)	
Surge	EN61000-4-5 $\pm 1kV$	Perf. Criteria A
	With an external input filter capacitor (Nippon chemi-con KY series, 220 μ F/100V)	
Conducted immunity	EN61000-4-6 3 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

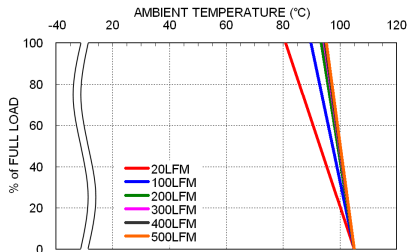


LCD10-48S05W Derating Curve

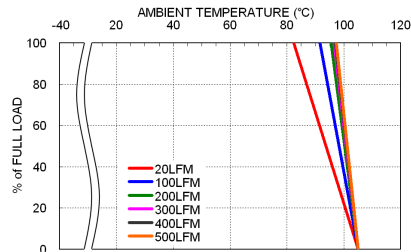

LCD10-48S05W Derating Curve With Heat-sink

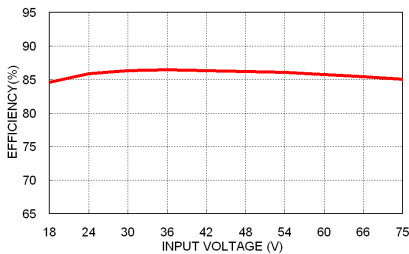

LCD10-48S05W Efficiency vs. Input Voltage

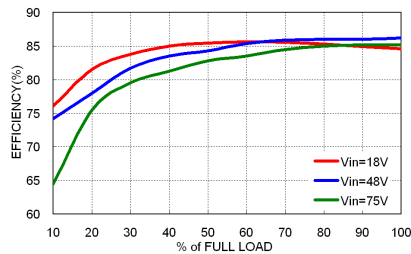

LCD10-48S05W Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
LCD10-24S□□W、LCD10-24D□□W	2	Slow-Blow
LCD10-48S□□W、LCD10-48D□□W	1.25	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

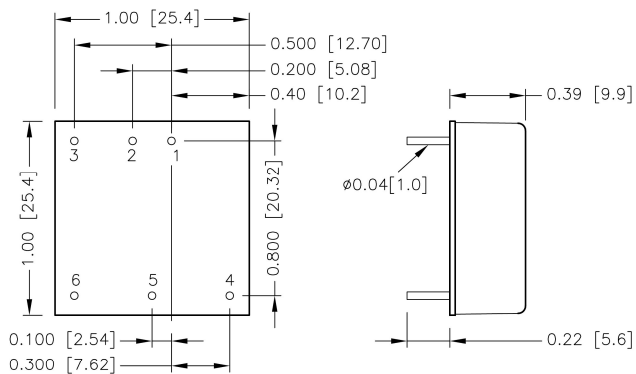

BOTTOM VIEW


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin pitch tolerance ±0.01 [0.25]
4. Pin dimension tolerance ±0.004[0.10]

HEAT-SINK OPTIONS


-HC (Heat-sink with clamps)

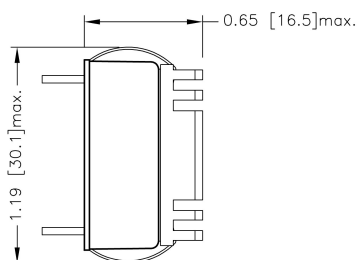


* All dimensions in inch [mm]

RECOMMENDED PAD LAYOUT

Standard

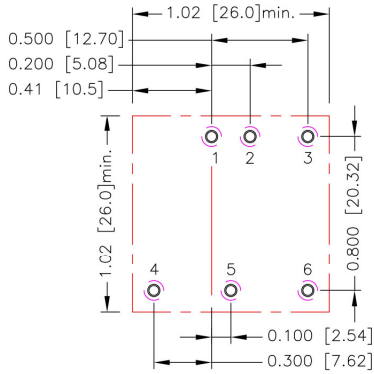

-HC

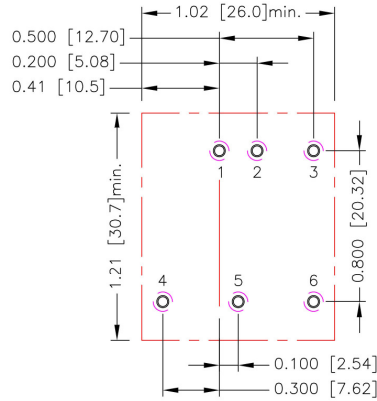

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6: $\Phi 0.051$ [1.30]
 Top view pad 1.2.3.4.5.6: $\Phi 0.064$ [1.63]
 Bottom view pad 1.2.3.4.5.6: $\Phi 0.102$ [2.60]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed 105°C.

When Operating, adequate cooling must be provided to maintain the test point temperature at or below 105°C.

Although the maximum point Temperature of the power modules is 105°C, you can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

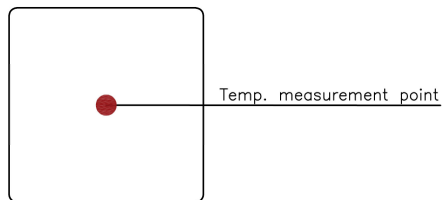

TOP VIEW

OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins. With an external resistor between the Trim and -Output pin, the output voltage set point increases. With an external resistor between the Trim and +Output pin, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W of rated power.

Trim Up Equation

$$R_U = \left[\frac{G \times L}{(V_{O,up} - L - K)} - H \right] \Omega$$

Trim Down Equation

$$R_D = \left[\frac{(V_{O,down} - L) \times G}{(V_O - V_{O,down})} - H \right] \Omega$$


Trim constants

Module	G	H	K	L
LCD10-□□S3P3W	5110	2050	0.8	2.5
LCD10-□□S05W	5110	2050	2.5	2.5
LCD10-□□S12W	10000	5110	9.5	2.5
LCD10-□□S15W	10000	5110	12.5	2.5
LCD10-□□S24W	56000	13000	21.5	2.5

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (kΩ)	385.071	191.511	126.990	94.730	75.374	62.470	53.253	46.340	40.963	36.662

□□S05W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	5.550	5.600	5.650	5.700	5.750	5.800	5.850	5.900	5.950	6.000
RU (kΩ)	21.177	19.242	17.604	16.200	14.983	13.919	12.979	12.144	11.397	10.725

□□S12W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

□□S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	16.650	16.800	16.950	17.100	17.250	17.400	17.550	17.700	17.850	18.000
RU (kΩ)	10.042	8.779	7.711	6.795	6.001	5.307	4.694	4.149	3.662	3.223


□□S24W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.240	24.480	24.720	24.960	25.200	25.440	25.680	25.920	26.160	26.400
RU (kΩ)	570.333	278.667	181.444	132.833	103.667	84.222	70.333	59.917	51.815	45.333

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	26.640	26.880	27.120	27.360	27.600	27.840	28.080	28.320	28.560	28.800
RU (kΩ)	40.030	35.611	31.872	28.667	25.889	23.458	21.314	19.407	17.702	16.167

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down


 S3P3W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (k Ω)	116.719	54.779	34.133	23.810	17.616	13.486	10.537	8.325	6.604	5.228

 S05W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k Ω)	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

 S12W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k Ω)	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

 S15W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k Ω)	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

 S24W

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.760	23.520	23.280	23.040	22.800	22.560	22.320	22.080	21.840	21.600
RD (k Ω)	4947.667	2439.333	1603.222	1185.167	934.333	767.111	647.667	558.083	488.407	432.667