


DIMENSIONS and recommended layout

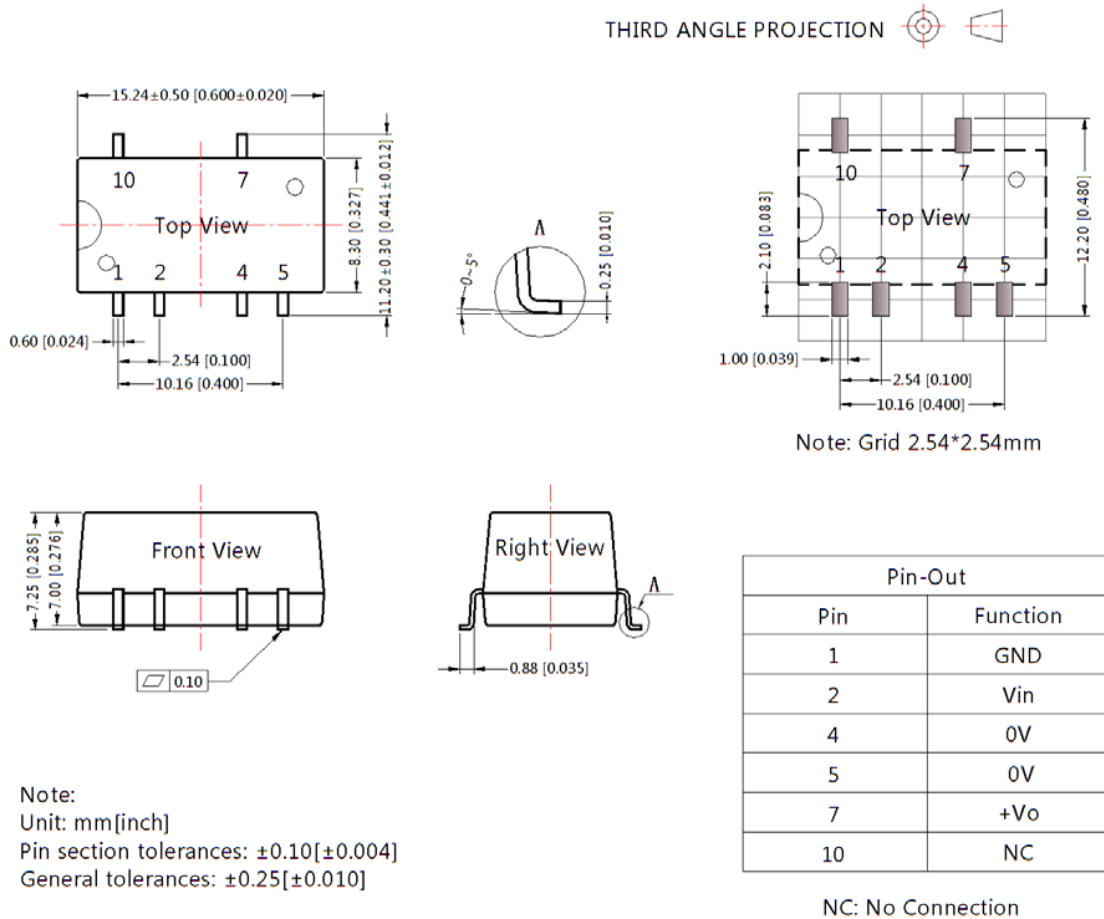

If the product is operated under the min. required load, the product performance cannot be guaranteed to comply with all performance indexes in this datasheet;

The max. capacitive load should be tested within the input voltage range and under full load conditions;

Unless otherwise specified, data in this data sheet should be tested under the conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load;

All index testing methods in this datasheet are based on our Company`s corporate standards;

The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;

We can provide product customization service;

Specifications of this product are subject to changes without prior notice.

he models listed above are standard types. If you need special specifications or have questions regarding packing
u e o ape&Reel or need application support, please contact our specialists: sales rsg-electronic.de or +4 - 84047-0