P-DUKE POWER

QAE150W Series

Quarter-Brick DC-DC Converter
Up to 132 Watts

3 YEARS WARRANTY

RoHS COMPLIANT

REACH COMPLIANT

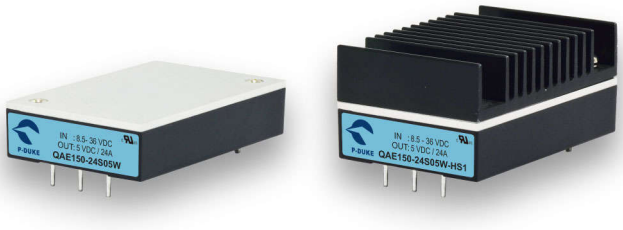

Railway | Automation | Datacom

IPC | Industry | Measurement

Telecom | Automobile | Boat

Charger | Medical | PV

cULus CB CE

3000 VAC Reinforced Insulation | 2250 VDC Basic Insulation | 4 : 1 Wide Input Range | NO Min. Load Required | LOW Standby Power | REMOTE ON OFF | OCP | OTP | OVP | SCP | UVP

PART NUMBER STRUCTURE

QAE150 - 48 S 05 W - P HS

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Ctrl and Pin Options	Assembly Option
	24: 8.5~36 **48:** 16.5~75 **110:** 40~160	**S:**Single	**3P3:**3.3 **05:**5 **12:**12 **15:**15 **24:**24 **30:**30 **48:**48	4:1	□:Negative logic, **P:**Positive logic,	□: None **HS:**7G-0029B-F; H=0.24” **HS1:**7G-0030B-F; H=0.5” **HS2:**7G-0031B-F; H=0.24” **HS3:**7G-0032B-F; H=0.5” **TH:**Through hole (No thread) * The module can’t equip Heat-sink with TH option.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25℃ unless otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load μF
QAE150-24S3P3W	8.5 ~ 36	3.3	30	25	88	91000
QAE150-24S05W	8.5 ~ 36	5	24	25	89	48000
QAE150-24S12W	8.5 ~ 36	12	10	25	88	8300
QAE150-24S15W	8.5 ~ 36	15	8	25	89	5300
QAE150-24S24W	8.5 ~ 36	24	5	25	88	2100
QAE150-24S30W	8.5 ~ 36	30	4	25	89	1300
QAE150-24S48W	8.5 ~ 36	48	2.5	25	88	520
QAE150-48S3P3W	16.5 ~ 75	3.3	30	15	88	91000
QAE150-48S05W	16.5 ~ 75	5	24	15	89	48000
QAE150-48S12W	16.5 ~ 75	12	10	15	89	8300
QAE150-48S15W	16.5 ~ 75	15	8	15	90	5300
QAE150-48S24W	16.5 ~ 75	24	5	15	90	2100
QAE150-48S30W	16.5 ~ 75	30	4	15	90	1300
QAE150-48S48W	16.5 ~ 75	48	2.5	15	90	520
QAE150-110S3P3W	40 ~ 160	3.3	30	8	88	91000
QAE150-110S05W	40 ~ 160	5	24	8	89	48000
QAE150-110S12W	40 ~ 160	12	11	8	88	9170
QAE150-110S15W	40 ~ 160	15	8.6	8	89	5730
QAE150-110S24W	40 ~ 160	24	5.5	8	89	2290
QAE150-110S30W	40 ~ 160	30	4.4	8	89	1470
QAE150-110S48W	40 ~ 160	48	2.7	8	89	560

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range		24Vin(nom)	8.5	24	36	
		48Vin(nom)	16.5	48	75	VDC
		110Vin(nom)	40	110	160	
Start up voltage		24Vin(nom)			9	
		48Vin(nom)			18	VDC
		110Vin(nom)			43	
Shutdown voltage		24Vin(nom)	7.3	7.7	8.1	
		48Vin(nom)	15.5	15.9	16.3	VDC
		110Vin(nom)	33.0	34.5	36.0	
Start up time	Constant resistive load	Power up		75	100	ms
		Remote ON/OFF		75	100	
Input surge voltage	1 second, max.	24Vin(nom)			50	
		48Vin(nom)			100	VDC
		110Vin(nom)			185	
Input filter (1)				Pi type		
Remote ON/OFF	Referred to –Vin pin	Negative logic (Standard) DC-DC ON		Short or 0 ~ 1.2VDC		
		Negative logic (Standard) DC-DC OFF		Open or 3 ~ 12 VDC		
		Positive logic (Option) DC-DC ON		Open or 3 ~ 12 VDC		
		Positive logic (Option) DC-DC OFF		Short or 0 ~ 1.2VDC		
		Input current of Ctrl pin	-0.5		1	mA
		Remote off input current		3		mA

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.1		+0.1	%
Load regulation	No Load to Full Load	3.3 & 5Vout	-0.2		+0.2	%
		Others	-0.1		+0.1	
Voltage adjustability	Maximum output deviation is inclusive of remote sense		-20		+10	%
Remote sense	% of Vout(nom) If remote sense is not being used, sense pins should connect to the output pins with the same polarity.				10	%
Ripple and noise	Measured by 20MHz bandwidth					
	With a 22μF/25V X7R MLCC	3.3Vout, 5Vout		75		mVp-p
	With a 22μF/25V X7R MLCC	12Vout, 15Vout		100		
	With a 4.7μF/50V X7R MLCC	24Vout, 30Vout		200		
	With a 2.2μF/100V X7R MLCC	48Vout		300		
Temperature coefficient			-0.02		+0.02	%/℃
Transient response recovery time	25% load step change			250		μs
Over voltage protection	% of Vout(nom); Hiccup mode		115		130	%
Over load protection	% of Iout rated; Hiccup mode		110		140	%
Short circuit protection			Continuous, automatics recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	110Vin(nom)	Input to Output	3000			VAC
	(Reinforced insulation)		Input (Output) to Base-Plate	1500			
	1 minute	Others	Input to Output	2250			VDC
	(Basic insulation)		Input (Output) to Base-Plate	2250			
Isolation resistance	500VDC			1			GΩ
Isolation capacitance						1500	pF
Switching frequency				270	300	330	kHz
Safety approvals	IEC/ EN/ UL 60950-1, 62368-1					UL:E193009 CB:UL(Demko)	
Standard approvals							EN50155 EN45545-2
Case material				Aluminum base-plate with plastic case			
Potting material							Silicone (UL94 V-0)
Weight							64g (2.26oz)
MTBF	MIL-HDBK-217F, Full load						3.684 x 10^5 hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating base-plate temperature			-40		+105	℃
Maximum case temperature					+105	℃
Over temperature protection				+110		℃
Storage temperature range			-55		+125	℃
Thermal impedance	Without Heat-sink			9		℃/W
	Mount on 2U iron base-plate			2.8		
	With 0.24" Height Heat-sink			7.1		
	With 0.5" Height Heat-sink			5.5		
Thermal shock						MIL-STD-810F
Shock						EN61373, MIL-STD-810F
Vibration						EN61373, MIL-STD-810F
Relative humidity						5% to 95% RH

EMC SPECIFICATIONS

Parameter	Conditions		Level
EMI	EN55011, EN55032	With external components	Class A, Class B
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2kV	Perf. Criteria A
	QAE150-24S□□W QAE150-48S□□W	With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KY series, 220μF/100V)	
	QAE150-110S□□W	With 3 pcs of aluminum electrolytic capacitor (Ruby-con BXF series, 100μF/250V)	
Surge	EN61000-4-5	EN55024:±2kV and EN50155:±2kV	Perf. Criteria A
	QAE150-24S□□W QAE150-48S□□W	With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KY series, 220μF/100V)	
	QAE150-110S□□W	With 3 pcs of aluminum electrolytic capacitor (Ruby-con BXF series, 100μF/250V)	
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

Note:

1. Input source impedance: The power module will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor.
   The QAE150-24S□□W and QAE150-48S□□W recommended Nippon Chemi-con KY series, 100μF/100V.
   The QAE150-110S□□W recommended Ruby-con BXF series, 39μF/200V.
2. BASE-PLATE GROUNDING: When connect two screw bolts to shield plane, the EMI could be reduced.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

CHARACTERISTIC CURVE

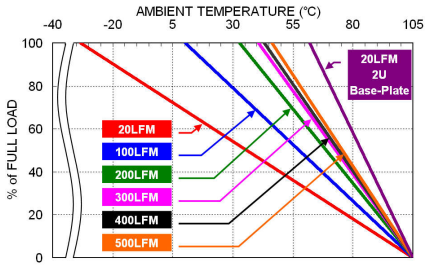

QAE150-24S05W Derating Curve

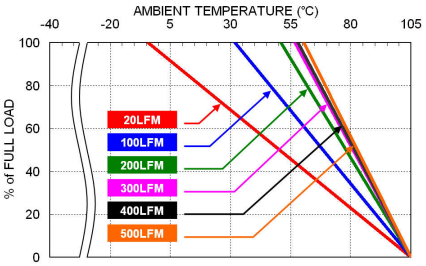

QAE150-24S05W Derating Curve
With 0.24" Height Heat-sink

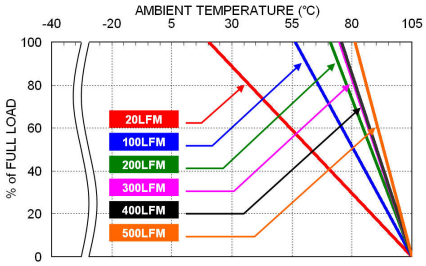

QAE150-24S05W Derating Curve
With 0.5" Height Heat-sink

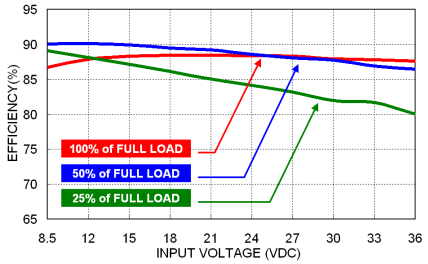

QAE150-24S05W Efficiency vs. Input Voltage

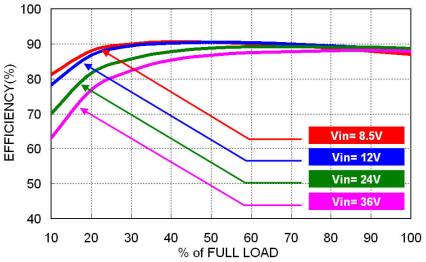

QAE150-24S05W Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.
This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.
To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.
The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
QAE150-24S□□W	25	Fast-Acting
QAE150-48S□□W	12	Fast-Acting
QAE150-110S□□W	6.3	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

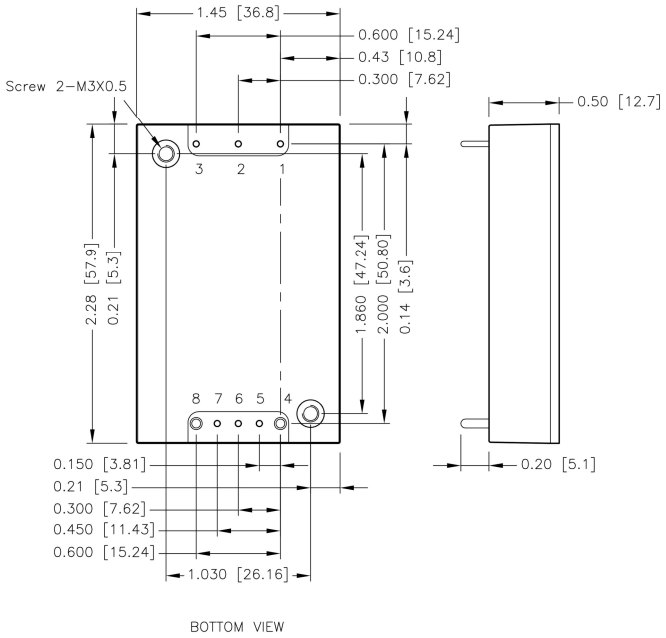

PIN CONNECTION

PIN	DEFINE	DIAMETER
1	- Vin	0.04 Inch
2	Ctrl	0.04 Inch
3	+ Vin	0.04 Inch
4	- Vout	0.06 Inch
5	- Sense	0.04 Inch
6	Trim	0.04 Inch
7	+ Sense	0.04 Inch
8	+ Vout	0.06 Inch

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
   x.xxx±0.010 [x.xx±0.25]
3. Pin pitch tolerance ±0.010 [0.25]
4. Pin dimension tolerance ±0.004[0.10]
5. The screw locked torque:MAX 3.5kgf-cm [0.34N-m]

RECOMMENDED PAD LAYOUT

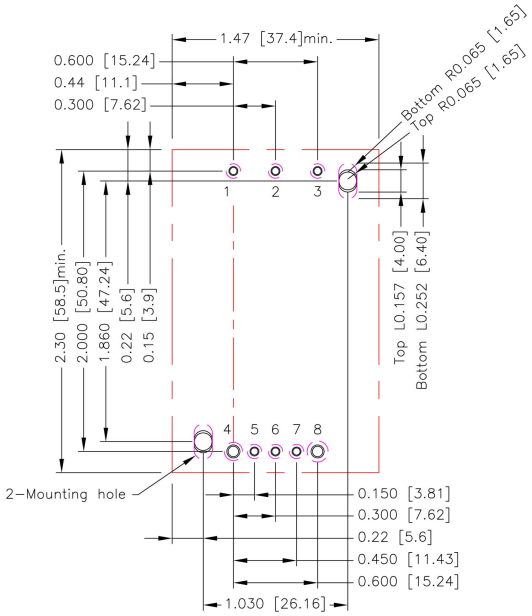

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.5.6.7: ∅0.051[1.30]
Through hole 4.8: ∅0.075[1.90]
Through hole of mounting: ∅0.126[3.20]
Top view pad 1.2.3.5.6.7: ∅0.064[1.63]
Top view pad 4.8: ∅0.094[2.38]
Top view pad of mounting:Groove R0.065[1.65]L0.157[4.00]
Bottom view pad 1.2.3.5.6.7: ∅0.102[2.60]
Bottom view pad 8: ∅0.150[3.80]
Bottom view pad 4: ∅0.130[3.30]
Bottom view pad of mounting:Groove R0.065[1.65]L0.252[6.40]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.
However, sufficient cooling should be provided to help ensure reliable operation of the unit.
Heat is removed by conduction, convection, and radiation to the surrounding Environment.
Proper cooling can be verified by measuring the point as the figure below.
The temperature at this location should not exceed “Maximum case temperature”.
When Operating, adequate cooling must be provided to maintain the test point temperature at or below “Maximum case temperature”.
You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).
- The iron base-plate dimension is 19” X 3.5” X 0.063” (The height is EIA standard 2U).
- The heat-sink is optional and P/N: 7G-0029B-F , 7G-0030B-F , 7G-0031B-F , 7G-0032B-F

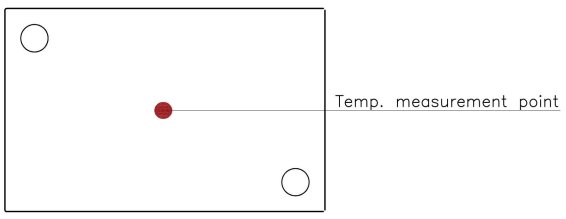

BASE PLATE

HEAT-SINK TYPE OPTIONS

QAE150-□□S□□W –**HS**
7G-0029B-F

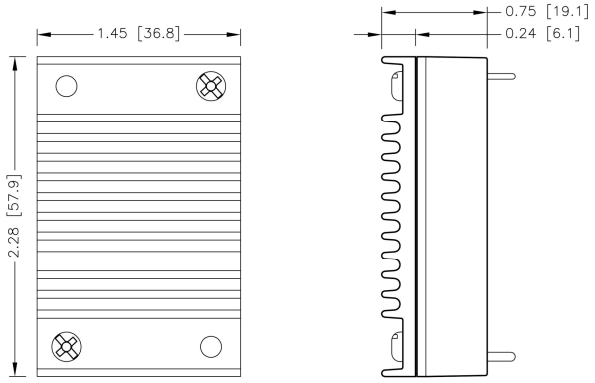

QAE150-□□S□□W–**HS1**
7G-0030B-F

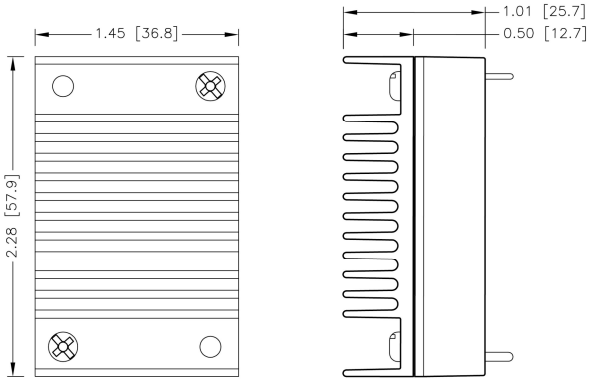

QAE150-□□S□□W –**HS2**
7G-0031B-F

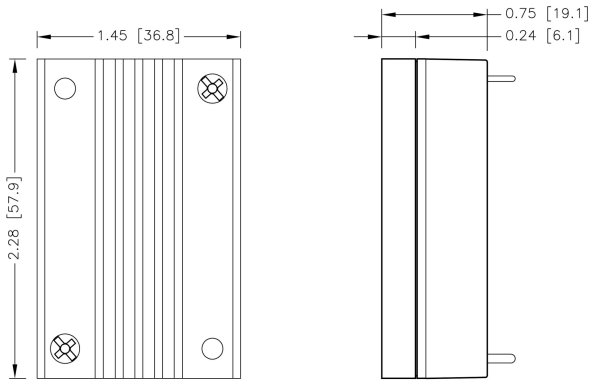

QAE150-□□S□□W –**HS3**
7G-0032B-F

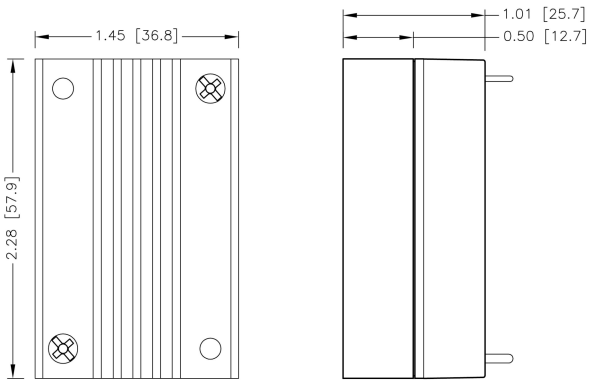

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]

OUTPUT VOLTAGE ADJUSTMENT

Output voltage is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting an external resistor between the Trim pin and either the +Sense or -Sense pins.
With an external resistor between the Trim and -Sense pin, the output voltage set point decreases.
With an external resistor between the Trim and +Sense pin, the output voltage set point increases.
Maximum output deviation is +10% inclusive of remote sense.
The external Trim resistor needs to be at least 1/8W of rated power.

■ **Trim Up Equation**

$$R_U = \left(\frac{5.11V_{OUT}(100+\Delta\%)}{1.225\Delta\%} - \frac{511+10.22\Delta\%}{\Delta\%} \right) k\Omega$$

■ **Trim Down Equation**

$$R_D = \left(\frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

EXTERNAL OUTPUT TRIMMING
Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3W

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU	(kΩ)	869.117	436.331	292.07	219.939	176.66	147.808	127.198	111.742	99.72	90.103

□□S05W

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.40	5.45	5.50
RU	(kΩ)	1585.35	797.994	535.542	404.316	325.58	273.09	235.596	207.476	185.605	168.109

□□S12W

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
RU	(kΩ)	4534.55	2287.19	1538.08	1163.52	938.78	788.956	681.939	601.676	539.25	489.309

□□S15W

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
RU	(kΩ)	5798.49	2925.42	1967.73	1488.89	1201.58	1010.04	873.229	770.619	690.812	626.966

□□S24W

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
RU	(kΩ)	9590.32	4840.11	3256.7	2465	1989.98	1673.3	1447.1	1277.45	1145.5	1039.94

□□S30W

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	30.3	30.6	30.9	31.2	31.5	31.8	32.1	32.4	32.7	33
RU	(kΩ)	12118.2	6116.57	4116.02	3115.74	2515.58	2115.47	1829.68	1615.33	1448.62	1315.25

□□S48W

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
RU	(kΩ)	19701.9	9945.94	6693.96	5067.97	4092.38	3441.99	2977.42	2628.99	2357.99	2141.19

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S□□W

△V (%)	1	2	3	4	5	6	7	8	9	10
RD (kΩ)	500.78	245.28	160.113	117.53	91.98	74.947	62.78	53.655	46.558	40.88

△V (%)	11	12	13	14	15	16	17	18	19	20
RD (kΩ)	36.235	32.363	29.088	26.28	23.847	21.718	19.839	18.169	16.675	15.33

P-DUKE Technology Co., Ltd.

Tel +886-4-2359-0668
Fax +886-4-2359-1337
Email sale@pduke.com
Web www.pduke.com
Add No. 36, 22nd Rd., Taichung Industrial Park, Taichung, Taiwan, R.O.C.