P-DUKE

QAE60U Series

QUARTER-BRICK DC-DC Converter
Up to 60 Watts

3 YEARS WARRANTY

RoHS COMPLIANT

REACH COMPLIANT

Railway | Automation | Datacom | IPC | Industry | Measurement | Telecom | Automobile | Boat | Charger | Medical | PV

CE

3000 VAC Reinforced Insulation | 2250 VDC Basic Insulation | 12:1 Ultra-Wide Input Range | NO Min. Load Required | LOW Standby Power | REMOTE ON OFF | OCP | OTP | OVP | SCP | UVP

PART NUMBER STRUCTURE

QAE60 - 72 S 05 U - P HS

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Ctrl and Pin Options	Assembly Option
	36: 9~75 **72:** 14~160	**S:**Single	**05:**5 **12:**12 **15:**15 **24:**24 **28:**28 **48:**48 **53:**53	8:1 12:1	□:Negative logic, 0.150" pin length **L:**Negative logic, 0.200" pin length **P:**Positive logic, 0.150" pin length **S:**Positive logic, 0.200" pin length	□: None **HS:**7G-0029B-F;H=0.24" **HS1:**7G-0030B-F;H=0.5" **HS2:**7G-0031B-F;H=0.24" **HS3:**7G-0032B-F;H=0.5" **TH:**Through hole (No thread)* * The module can't equip Heat-sink with TH option.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25℃ unless otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load A	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load μF
QAE60-36S05U	9 ~ 75	5	12	20	89	24000
QAE60-36S12U	9 ~ 75	12	5	20	89	4200
QAE60-36S15U	9 ~ 75	15	4	20	89	2700
QAE60-36S24U	9 ~ 75	24	2.5	20	90	1100
QAE60-36S28U	9 ~ 75	28	2.15	20	90	780
QAE60-36S48U	9 ~ 75	48	1.25	20	92	260
QAE60-36S53U	9 ~ 75	53	1.14	20	90	220
QAE60-72S05U	14 ~ 160	5	12	12	89	24000
QAE60-72S12U	14 ~ 160	12	5	15	89	4200
QAE60-72S15U	14 ~ 160	15	4	15	89	2700
QAE60-72S24U	14 ~ 160	24	2.5	12	90	1100
QAE60-72S28U	14 ~ 160	28	2.15	12	90	780
QAE60-72S48U	14 ~ 160	48	1.25	12	90	260
QAE60-72S53U	14 ~ 160	53	1.14	12	90	220

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range		36Vin(nom) 72Vin(nom)	9 14	36 72	75 160	VDC
Start up voltage		36Vin(nom) 72Vin(nom)			9 14	VDC
Shutdown voltage		36Vin(nom) 72Vin(nom)	7.3 10	7.7 11	8.1 12	VDC
Start up time	Constant resistive load	Power up Remote ON/OFF		75 75	100 100	ms
Input Transient voltage	100 mS, max.	36Vin(nom) 72Vin(nom)	8.1 12			VDC
Input surge voltage	1 second, max.	36Vin(nom) 72Vin(nom)			100 185	VDC
Input filter[1]				Pi type		
Remote ON/OFF	Referred to –Vin pin	Negative logic (Standard) DC-DC ON DC-DC OFF Positive logic (Option) DC-DC ON DC-DC OFF Input current of Ctrl pin Remote off input current		Short or 0 ~ 1.2VDC Open or 3 ~ 12VDC Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC 3	-0.5 1	mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.1		+0.1	%
Load regulation	No Load to Full Load	-0.1		+0.1	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense	-20		+10	%
Remote sense	% of Vout(nom). If remote sense is not being used, SENSE pins should connected to corresponding polarity OUTPUT pins.			10	%
Ripple and noise	Measured by 20MHz bandwidth With a 1μF/25V X7R MLCC and a 22μF/25V POS-CAP 5Vout With a 22μF/25V X7R MLCC 12Vout, 15Vout With a 4.7μF/50V X7R MLCC 24Vout, 28Vout With a 2.2μF/100V X7R MLCC 48Vout, 53Vout		 75 100 200 300		 mVp-p
Temperature coefficient		-0.02		+0.02	%/℃
Transient response recovery time	25% load step change		250		μs
Over voltage protection	% of Vout(nom); Hiccup mode	120		135	%
Over load protection	% of Iout rated; Hiccup mode	120		140	%
Short circuit protection		Continuous, automatics recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Reinforced insulation)	72Vin(nom)	Input to Output Input (Output) to Base-Plate	3000 1500			VAC
	1 minute (Basic insulation)	36Vin(nom)	Input to Output Input (Output) to Base-Plate	2250 1600			VDC
Isolation resistance	500VDC			1			GΩ
Isolation capacitance						1000	pF
Switching frequency					180		kHz
Safety approvals (Pending)						IEC/ UL/ EN60950-1 IEC/ UL/ EN62368-1	
Standard approvals (Pending)	Railway					EN50155 EN45545-2	
Case material				Aluminum base-plate with plastic case			
Potting material						Silicone (UL94 V-0)	
Weight						64g (2.26oz)	
MTBF	MIL-HDBK-217F, Full load					7.381 x 10^5 hrs	

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating base-plate temperature	With derating	-40		+105	℃
Maximum case temperature				+105	℃
Over temperature protection			+110		℃
Storage temperature range		-55		+125	℃
Thermal impedance	DC-DC module Only mount on the iron base-plate Heat-sink type with 0.24" Height Heat-sink type with 0.5" Height		8.27 2.43 7.40 6.16		℃/W
Thermal shock				EN61373, MIL-STD-810F	
Vibration				EN61373, MIL-STD-810F	
Relative humidity				5% to 95% RH	

EMC SPECIFICATIONS

Parameter	Conditions		Level
EMI	EN55011, EN55032	With external components	Class A, Class B
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2kV	Perf. Criteria A
	QAE60-36S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220μF/100V)	
	QAE60-72S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KXJ series, 150μF/200V)	
Surge	EN61000-4-5	EN55024:±1kV and EN50155:±2kV	Perf. Criteria A
	QAE60-36S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220μF/100V)	
	QAE60-72S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KXJ series, 150μF/200V)	
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

Note:

1. Input source impedance: The power module will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor.
   The QAE60-36S□□U recommended Nippon Chemi-con KY series, 220μF/100V.
   The QAE60-72S□□U recommended Nippon Chemi-con KXJ series, 150μF/200V.
2. BASE-PLATE GROUNDING: When connect two screw bolts to shield plane, the EMI could be reduced.

CAUTION: This power module is not internally fused. An input line fuse must always be used.

CHARACTERISTIC CURVE

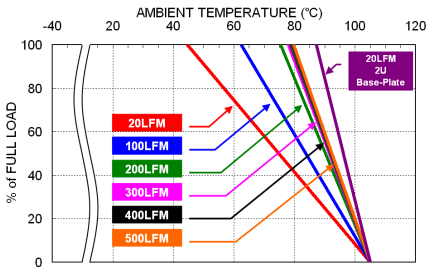

QAE60-72S05U Derating Curve
(See Thermal Considerations)

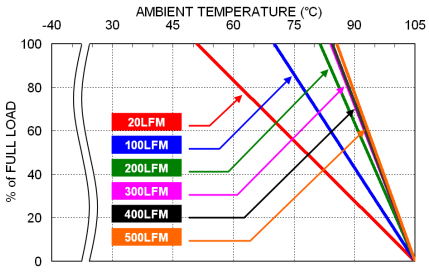

QAE60-72S05U Derating Curve
With 0.24" Height Heat-sink
(See Thermal Considerations)

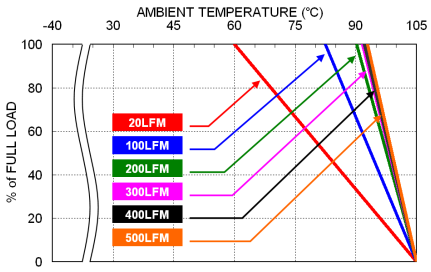

QAE60-72S05U Derating Curve
With 0.5" Height Heat-sink
(See Thermal Considerations)

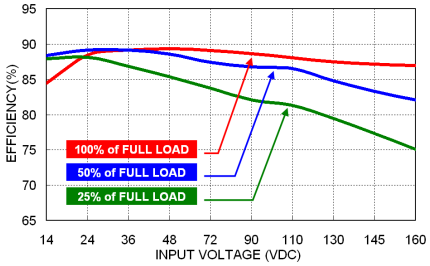

QAE60-72S05U Efficiency vs. Input Voltage

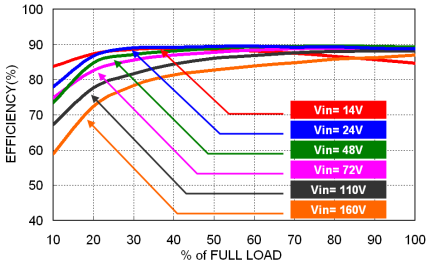

QAE60-72S05U Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.
This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.
To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.
The input line fuse suggest as below：

Model	Fuse Rating (A)	Fuse Type
QAE60-36S□□U	12	Fast-Acting
QAE60-72S□□U	8	Fast-Acting

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

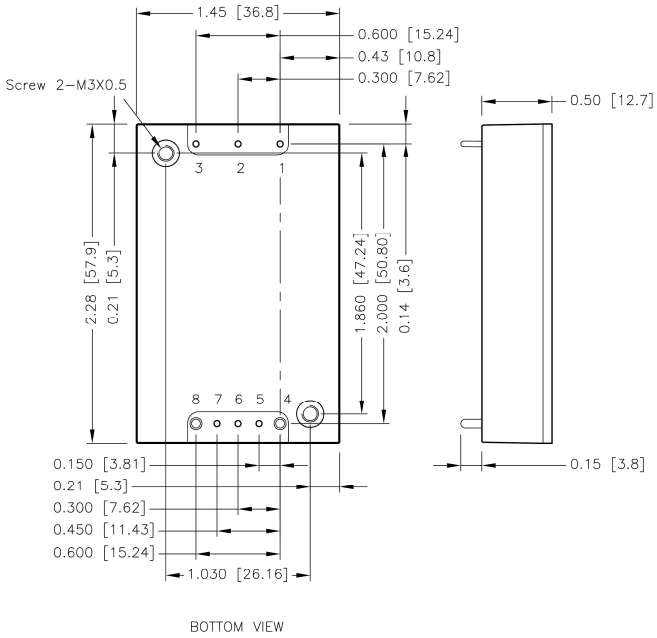

PIN CONNECTION

PIN	DEFINE	DIAMETER
1	- Vin	0.04 Inch
2	Ctrl	0.04 Inch
3	+ Vin	0.04 Inch
4	- Vout	0.06 Inch
5	- Sense	0.04 Inch
6	Trim	0.04 Inch
7	+ Sense	0.04 Inch
8	+ Vout	0.06 Inch

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
   x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]
4. The screw locked torque: MAX 3.5kgf-cm [0.34N-m]

RECOMMENDED PAD LAYOUT

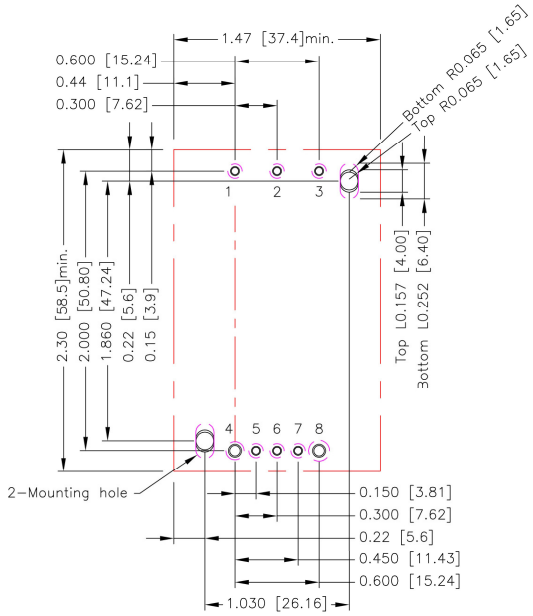

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.5.6.7: ∅0.051[1.30]
Through hole 4.8: ∅0.075[1.90]
Through hole of mounting: ∅0.126[3.20]
Top view pad 1.2.3.5.6.7: ∅0.064[1.63]
Top view pad 4.8: ∅0.094[2.38]
Top view pad of mounting:Groove R0.065[1.65]L0.157[4.00]
Bottom view pad 1.2.3.5.6.7: ∅0.102[2.60]
Bottom view pad 8: ∅0.150[3.80]
Bottom view pad 4: ∅0.130[3.30]
Bottom view pad of mounting:Groove R0.065[1.65]L0.252[6.40]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.
However, sufficient cooling should be provided to help ensure reliable operation of the unit.
Heat is removed by conduction, convection, and radiation to the surrounding Environment.
Proper cooling can be verified by measuring the point as the figure below.
The temperature at this location should not exceed “Maximum case temperature”.
When Operating, adequate cooling must be provided to maintain the test point temperature at or below “Maximum case temperature”.
You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).
- The iron base-plate dimension is 19” X 3.5” X 0.063” (The height is EIA standard 2U).
- The heat-sink is optional and P/N: 7G-0029B-F , 7G-0030B-F , 7G-0031B-F , 7G-0032B-F

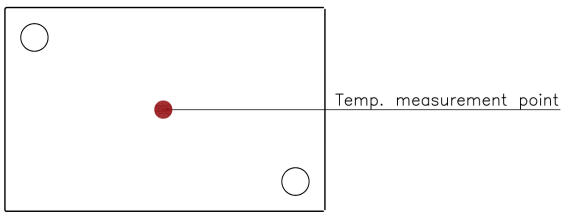

BASE PLATE

HEAT-SINK TYPE OPTIONS

QAE60-□□S□□U –**HS**
7G-0029B-F

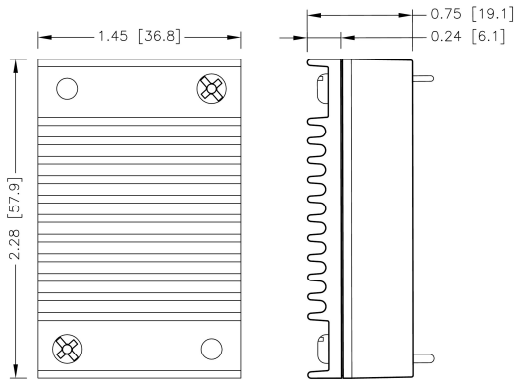

QAE60-□□S□□U –**HS1**
7G-0030B-F

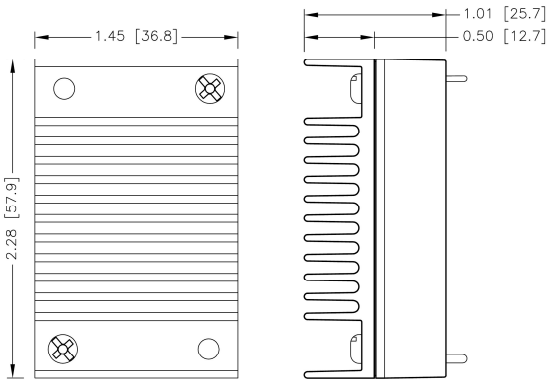

QAE60-□□S□□U –**HS2**
7G-0031B-F

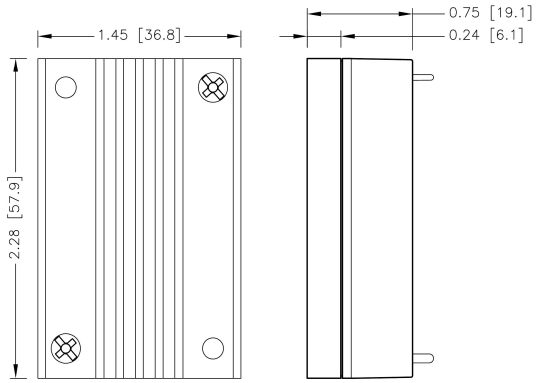

QAE60-□□S□□U –**HS3**
7G-0032B-F

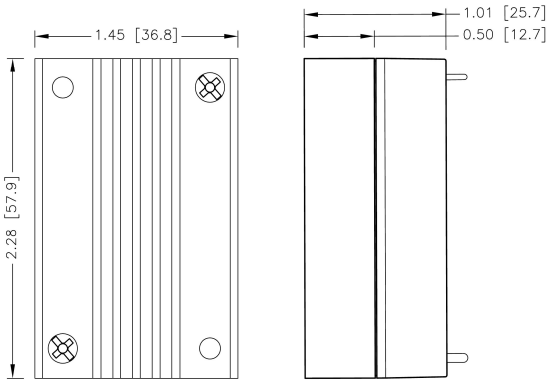

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]

OUTPUT VOLTAGE ADJUSTMENT

Output voltage is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting an external resistor between the Trim pin and either the +Sense or -Sense pins.
With an external resistor between the Trim and -Sense pin, the output voltage set point decreases.
With an external resistor between the Trim and +Sense pin, the output voltage set point increases.
Maximum output deviation is +10% inclusive of remote sense.
The external TRIM resistor needs to be at least 1/8W of rated power.

■ **Trim Up Equation**

$$R_U = \left(\frac{5.11V_{OUT}(100+\Delta\%)}{1.225\Delta\%} - \frac{511+10.22\Delta\%}{\Delta\%} \right) k\Omega$$

■ **Trim Down Equation**

$$R_D = \left(\frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

EXTERNAL OUTPUT TRIMMING
Output can be externally trimmed by using the method shown below.

Trim-up



□□S05U

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.40	5.45	5.50
RU	(kΩ)	1585.35	797.994	535.542	404.316	325.58	273.09	235.596	207.476	185.605	168.109

□□S12U

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
RU	(kΩ)	4534.55	2287.19	1538.08	1163.52	938.78	788.956	681.939	601.676	539.25	489.309

□□S15U

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
RU	(kΩ)	5798.49	2925.42	1967.73	1488.89	1201.58	1010.04	873.229	770.619	690.812	626.966

□□S24U

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
RU	(kΩ)	9590.32	4840.11	3256.7	2465	1989.98	1673.3	1447.1	1277.45	1145.5	1039.94

□□S28U

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	28.28	28.56	28.84	29.12	29.40	29.68	29.96	30.24	30.52	30.80
RU	(kΩ)	11275.58	5691.08	3829.58	2898.83	2340.38	1968.08	1702.151	1502.705	1347.58	1223.48

□□S48U

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
RU	(kΩ)	19701.9	9945.94	6693.96	5067.97	4092.38	3441.99	2977.42	2628.99	2357.99	2141.19

□□S53U

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	53.53	54.06	54.59	55.12	55.65	56.18	56.71	57.24	57.77	58.30
RU	(kΩ)	21808.437	11009.651	7410.056	5610.259	4530.38	3810.461	3296.233	2910.562	2610.596	2370.623

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S□□U

△V (%)	1	2	3	4	5	6	7	8	9	10
RD (kΩ)	500.78	245.28	160.113	117.53	91.98	74.947	62.78	53.655	46.558	40.88

△V (%)	11	12	13	14	15	16	17	18	19	20
RD (kΩ)	36.235	32.363	29.088	26.28	23.847	21.718	19.839	18.169	16.675	15.33

P-DUKE

P-DUKE Technology Co., Ltd.

Tel +886-4-2359-0668
Fax +886-4-2359-1337
Email sale@pduke.com
Web www.pduke.com
Add No. 36, 22nd Rd., Taichung Industrial Park, Taichung, Taiwan, R.O.C.