P-DUKE

P-DUKE POWER

RCD15 Series

DC-DC Converter
Up to 15 Watts

3 YEARS WARRANTY

RoHS COMPLIANT

REACH COMPLIANT

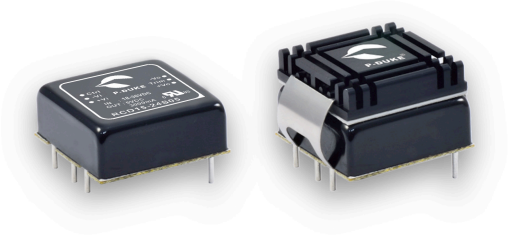

Automation | Datacom | IPC

Industry | Measurement | Telecom

Automobile | Boat | Charger

Medical | PV | Railway

c UL us | CB | CE

3000 VDC Isolation Voltage | 1600 VDC Isolation Voltage | 2 : 1 Input Range | 6 sided Shielding | Internal EN55032 Class A Filter | LOW Standby Power | NO Min. Load Required | REMOTE ON OFF | OCP | OVP | SCP | UVP

PART NUMBER STRUCTURE

RCD15 - 48 S 05 H - M3 A HC

Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Assembly Option	Operating Temp. Options	Remote ON/OFF & Trim Option	Assembly Option
	12:9~18 **24:**18~36 **48:**36~75	**S:**Single	**3P3:**3.3 **05:**5 **12:**12 **15:**15 **24:**24	□: Standard type 1600VDC isolation **H:** 3000VDC isolation	□:-40°C~105°C **M3:**-55°C~105°C	□:Negative logic **A:**Positive logic **B:**Without Ctrl pin **C:**Negative logic without Trim pin **D:**Without Ctrl & Trim pin **E:**Positive logic without Trim pin	□: None **HC:** Heat-sink with Clamp
		D:Dual	**05:**±5 **12:**±12 **15:**±15 **24:**±24				

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25℃ unless otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load mA	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load μF
RCD15-12S3P3	9 ~ 18	3.3	4500	8	88	5200
RCD15-12S05	9 ~ 18	5	3000	8	90	3600
RCD15-12S12	9 ~ 18	12	1300	8	89	600
RCD15-12S15	9 ~ 18	15	1000	10	90	500
RCD15-12S24	9 ~ 18	24	625	10	91	200
RCD15-12D05	9 ~ 18	±5	±1500	10	86	±1500
RCD15-12D12	9 ~ 18	±12	±625	10	90	±360
RCD15-12D15	9 ~ 18	±15	±500	14	90	±250
RCD15-12D24	9 ~ 18	±24	±315	14	90	±100
RCD15-24S3P3	18 ~ 36	3.3	4500	8	88	5200
RCD15-24S05	18 ~ 36	5	3000	8	90	3600
RCD15-24S12	18 ~ 36	12	1300	8	89	600
RCD15-24S15	18 ~ 36	15	1000	8	90	500
RCD15-24S24	18 ~ 36	24	625	8	91	200
RCD15-24D05	18 ~ 36	±5	±1500	8	86	±1500
RCD15-24D12	18 ~ 36	±12	±625	8	90	±360
RCD15-24D15	18 ~ 36	±15	±500	9	90	±250
RCD15-24D24	18 ~ 36	±24	±315	9	90	±100
RCD15-48S3P3	36 ~ 75	3.3	4500	7	87	5200
RCD15-48S05	36 ~ 75	5	3000	7	89	3600
RCD15-48S12	36 ~ 75	12	1300	7	89	600
RCD15-48S15	36 ~ 75	15	1000	7	89	500
RCD15-48S24	36 ~ 75	24	625	7	90	200
RCD15-48D05	36 ~ 75	±5	±1500	7	85	±1500
RCD15-48D12	36 ~ 75	±12	±625	7	89	±360
RCD15-48D15	36 ~ 75	±15	±500	7	89	±250
RCD15-48D24	36 ~ 75	±24	±315	7	89	±100

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range		12Vin(nom)	9	12	18	
		24Vin(nom)	18	24	36	VDC
		48Vin(nom)	36	48	75	
Start up voltage		12Vin(nom)			9	
		24Vin(nom)			18	VDC
		48Vin(nom)			36	
Shutdown voltage		12Vin(nom)	7.5	8	8.8	
		24Vin(nom)	15.5	16	17.5	VDC
		48Vin(nom)	32.5	33	35.5	
Start up time	Constant resistive load	Power up		30	40	ms
		Remote ON/OFF		30	40	
Input surge voltage	1 second, max.	12Vin(nom)			25	
		24Vin(nom)			50	VDC
		48Vin(nom)			100	
Input filter				Pi type		
Remote ON/OFF	Referred to –Vin pin	Positive logic DC-DC ON		Open or 3 ~ 15VDC		
		(Option) DC-DC OFF		Short or 0 ~ 1.2VDC		
		Negative logic DC-DC ON		Short or 0 ~ 1.2VDC		
		(Standard) DC-DC OFF		Open or 3 ~ 15VDC		
		Input current of Ctrl pin	-0.5		+1.0	mA
		Remote off input current		1.5		mA

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	Single	-0.2		+0.2	%
		Dual	-0.5		+0.5	
Load regulation	No Load to Full Load	Single	-0.2		+0.2	%
		Dual	-1.0		+1.0	
	10% Load to 90% Load	Single	-0.1		+0.1	
		Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Voltage adjustability	Single output	15Vout,24Vout	-10		+20	%
		Others	-10		+10	
Ripple and noise	20MHz bandwidth					mVp-p
		Single				
	With a 10μF/6.3V X7R MLCC	3.3Vout, 5Vout		75		
	With a 1μF/25V X7R MLCC	12Vout, 15Vout		100		
	With a 2.2μF/50V X7R MLCC	24Vout		125		
		Dual				
	With a 10μF/6.3V X7R MLCC for each output	5Vout		75		
	With a 1μF/25V X7R MLCC for each output	12Vout, 15Vout		100		
	With a 2.2μF/50V X7R MLCC for each output	24Vout		125		
Temperature coefficient			-0.02		+0.02	%/℃
Transient response recovery time	25% load step change			250		μs
Over voltage protection		3.3Vout	3.7		5.4	VDC
		5Vout	5.6		7.0	
		12Vout	13.5		19.6	
		15Vout	18.3		22.0	
		24Vout	29.1		32.5	
Over load protection	% of Iout rated		120	150	190	%
Short circuit protection			Continuous, automatics recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	Standard Type	1600			VDC
			Suffix "H"	3000			
		Input (Output) to Case	Standard Type	1000			
			Suffix "H"	1600			
Isolation resistance	500VDC			1			GΩ
Isolation capacitance						2000	pF
Switching frequency			3.3Vout, 5Vout	220	245	270	kHz
			Others	270	300	330	
Safety approvals	IEC/ UL/ EN60950-1					UL:E193009	
	IEC /UL/ EN62368-1					CB:UL(Demko)	
Case material							copper
Base material							FR4 PCB
Potting material							Silicone (UL94 V-0)
Weight							16.5g (0.58oz)
MTBF	MIL-HDBK-217F, Full load						1.672×10^6 hrs

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard type	With derating	-40		+105	℃
	M3 version	With derating	-55		+105	
Maximum case temperature					+105	℃
Storage temperature range			-55		+125	℃
Thermal impendance		Without heat-sink		17.0		℃/W
		With heat-sink		15.3		
Thermal shock					MIL-STD-810F	
Shock					MIL-STD-810F	
Vibration					MIL-STD-810F	
Relative humidity					5% to 95% RH	

EMC SPECIFICATIONS

Parameter	Conditions		Level
EMI	EN55032, EN55011	Without external components	Class A
		With external components	Class B
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	±2kV	Perf. Criteria A
	RCD15-12□□□	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 470μF/50V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) in parallel	
	RCD15-24□□□	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 470μF/50V) and a TVS (SMDJ70A, 70V, 3000Watt peak pulse power) in parallel	
	RCD15-48□□□	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220μF/100V) and a TVS (SMDJ100A, 100V, 3000Watt peak pulse power) in parallel	
Surge	EN61000-4-5	±2kV	Perf. Criteria A
	RCD15-12□□□	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 470μF/50V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) in parallel	
	RCD15-24□□□	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 470μF/50V) and a TVS (SMDJ70A, 70V, 3000Watt peak pulse power) in parallel	
	RCD15-48□□□	With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220μF/100V) and a TVS (SMDJ100A, 100V, 3000Watt peak pulse power) in parallel	
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.

CHARACTERISTIC CURVE

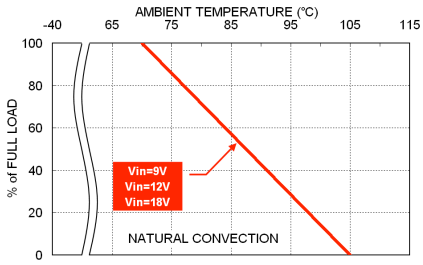

RCD15-12□□□ Derating Curve

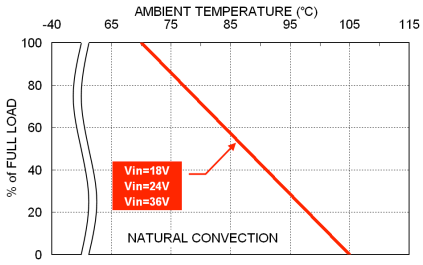

RCD15-24□□□ Derating Curve

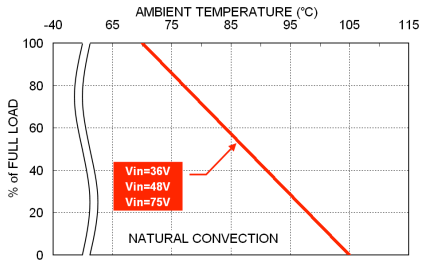

RCD15-48□□□ Derating Curve

*Except for RCD15-□□□D05

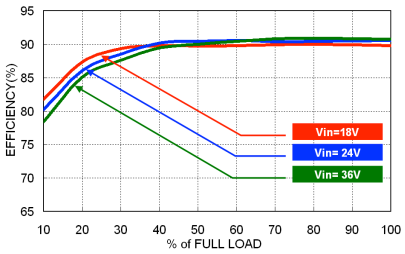

RCD15-24S05 Efficiency vs. Output Load

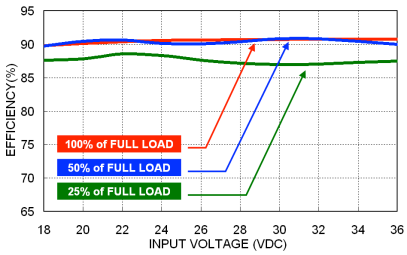

RCD15-24S05 Efficiency vs. Input Voltage

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.
This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.
To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.
The input line fuse suggest as below：

Modules	Fuse Rating (A)	Fuse Type
RCD15-12S□□、RCD15-12D□□	3.15	Slow-Blow
RCD15-24S□□、RCD15-24D□□	1.6	Slow-Blow
RCD15-48S□□、RCD15-48D□□	0.8	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin..

MECHANICAL DRAWING

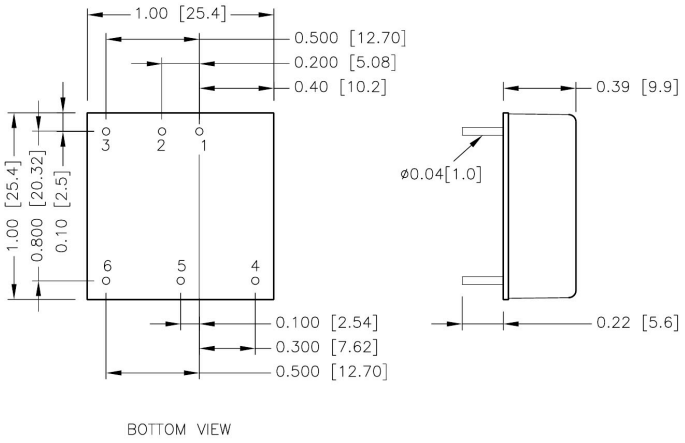

PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
   x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]

HEAT-SINK OPTIONS

-HC (Heat-sink with clamps)

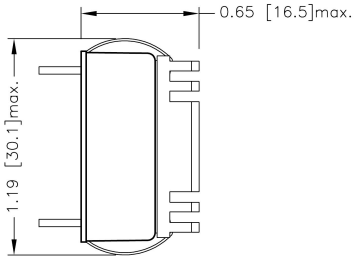

* All dimensions in inch [mm]

RECOMMENDED PAD LAYOUT

Standard

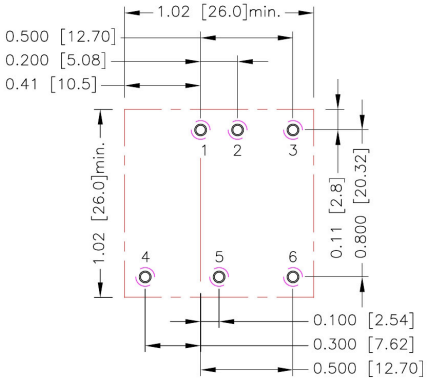

-HC

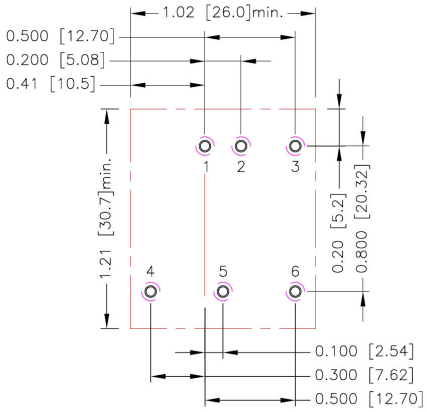

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5.6: Φ0.051[1.30]
Top view pad 1.2.3.4.5.6: Φ0.064[1.63]
Bottom view pad 1.2.3.4.5.6: Φ0.102[2.60]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.
However, sufficient cooling should be provided to help ensure reliable operation of the unit.
Heat is removed by conduction, convection, and radiation to the surrounding Environment.
Proper cooling can be verified by measuring the point as the figure below.
The temperature at this location should not exceed “Maximum case temperature”.
When Operating, adequate cooling must be provided to maintain the test point temperature at or below “Maximum case temperature”.
You can limit this Temperature to a lower value for extremely high reliability.

■ Thermal test condition with vertical direction by natural convection (20LFM).

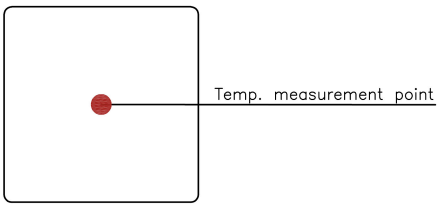

TOP VIEW

OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module.
This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins.
With an external resistor between the Trim and -Output pin, the output voltage set point increases.
With an external resistor between the Trim and +Output pin, the output voltage set point decreases.
The external Trim resistor needs to be at least 1/16W of rated power.

■ Trim Up Equation

$$R_U = \left[\frac{G \times L}{(V_{O,up} - L - K)} - H \right] \Omega$$

■ Trim Down Equation

$$R_D = \left[\frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$

■ Trim Constants

Module	G	H	K	L
RCD15-□□S3P3	5110	2050	0.8	2.5
RCD15-□□S05	5110	2050	2.5	2.5
RCD15-□□S12	10000	5110	9.5	2.5
RCD15-□□S15	10000	5110	12.5	2.5
RCD15-□□S24	56000	13000	21.5	2.5

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU	(kΩ)	385.071	191.511	126.990	94.730	75.374	62.470	53.253	46.340	40.963	36.662

□□S05

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU	(kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

□□S12

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU	(kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

□□S15

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU	(kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

△V	(%)	11	12	13	14	15	16	17	18	19	20
Vout	(V)	16.650	16.800	16.950	17.100	17.250	17.400	17.550	17.700	17.850	18.000
RU	(kΩ)	10.042	8.779	7.711	6.795	6.001	5.307	4.694	4.149	3.662	3.223

□□S24

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	24.240	24.480	24.720	24.960	25.200	25.440	25.680	25.920	26.160	26.400
RU	(kΩ)	570.333	278.667	181.444	132.833	103.667	84.222	70.333	59.917	51.815	45.333

△V	(%)	11	12	13	14	15	16	17	18	19	20
Vout	(V)	26.640	26.880	27.120	27.360	27.600	27.840	28.080	28.320	28.560	28.800
RU	(kΩ)	40.030	35.611	31.872	28.667	25.889	23.458	21.314	19.407	17.702	16.167

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S3P3

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD	(kΩ)	116.719	54.779	34.133	23.810	17.616	13.486	10.537	8.325	6.604	5.228

□□S05

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD	(kΩ)	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

□□S12

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD	(kΩ)	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

□□S15

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD	(kΩ)	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

□□S24

△V	(%)	1	2	3	4	5	6	7	8	9	10
Vout	(V)	23.760	23.520	23.280	23.040	22.800	22.560	22.320	22.080	21.840	21.600
RD	(kΩ)	4947.667	2439.333	1603.222	1185.167	934.333	767.111	647.667	558.083	488.407	432.667

P-DUKE®

P-DUKE Technology Co., Ltd.

Tel +886-4-2359-0668
Fax +886-4-2359-1337
Email sale@pduke.com
Web www.pduke.com
Add No. 36, 22nd Rd., Taichung Industrial Park, Taichung, Taiwan, R.O.C.