



P-DUKE POWER

FKC08W Series

DC-DC Converter
Up to 8 Watts

3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Railway



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



1600
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

SCP

UVP

PART NUMBER STRUCTURE

FKC08	-	48	S	05	W	-	SMD	M3
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Mounting Type Option	Operating Temp. Option
		24:9~36 48:18~75 110:43~160	S:Single	3P3:3.3 05:5 12:12 15:15	4 : 1		☐ : DIP type SMD: SMD type	☐ : Standard -40~+105°C With derating M3: M3 Version -55~+105°C With derating
			D:Dual	05:±5 12:±12 15:±15				

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
FKC08-24S3P3W	9 ~ 36	3.3	2400	40	85	1330
FKC08-24S05W	9 ~ 36	5	1600	40	87	1330
FKC08-24S12W	9 ~ 36	12	666	25	86	288
FKC08-24S15W	9 ~ 36	15	533	25	86	200
FKC08-24D05W	9 ~ 36	±5	±800	20	84	±900
FKC08-24D12W	9 ~ 36	±12	±333	25	86	±133
FKC08-24D15W	9 ~ 36	±15	±267	25	86	±90
FKC08-48S3P3W	18 ~ 75	3.3	2400	20	85	1330
FKC08-48S05W	18 ~ 75	5	1600	20	87	1330
FKC08-48S12W	18 ~ 75	12	666	13	87	288
FKC08-48S15W	18 ~ 75	15	533	13	88	200
FKC08-48D05W	18 ~ 75	±5	±800	10	84	±900
FKC08-48D12W	18 ~ 75	±12	±333	13	87	±133
FKC08-48D15W	18 ~ 75	±15	±267	13	87	±90
FKC08-110S3P3W	43 ~ 160	3.3	2400	8	84	1330
FKC08-110S05W	43 ~ 160	5	1600	8	85	1330
FKC08-110S12W	43 ~ 160	12	666	4	86	288
FKC08-110S15W	43 ~ 160	15	533	4	86	200
FKC08-110D05W	43 ~ 160	±5	±800	5	82	±900
FKC08-110D12W	43 ~ 160	±12	±333	5	85	±133
FKC08-110D15W	43 ~ 160	±15	±267	5	85	±90

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom) 48Vin(nom) 110Vin(nom)	9 18 43	24 48 110	36 75 160	VDC
Start up voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)			9 18 43	VDC
Shutdown voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)	7 15 37	8 16 40	8.8 17.5 42	VDC
Start up time	Constant resistive load Power up Remote ON/OFF		450 5		ms
Input surge voltage	100 ms, max. 24Vin(nom) 48Vin(nom) 110Vin(nom)			50 100 170	VDC
Input filter				Pi type	
Remote ON/OFF	Referred to –Vin pin Positive logic DC-DC ON DC-DC OFF Input current of Ctrl pin Remote off input current	-0.5	2.5	Open or 3.0 ~ 12VDC Short or 0 ~ 1.2VDC +0.5	mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Voltage accuracy				-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load			-0.2		+0.2	%
Load regulation	No Load to Full Load	DIP type	Single	-0.5		+0.5	%
			Dual	-1.0		+1.0	
	10% Load to 90% Load	SMD type	Single	-1.0		+1.0	
			Dual	-1.0		+1.0	
		DIP type	Single	-0.3		+0.3	
			Dual	-0.8		+0.8	
		SMD type	Single	-0.8		+0.8	
			Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL		Dual	-5.0		+5.0	%
Ripple and noise	20MHz bandwidth		24Vin(nom)		50		mVp-p
		48Vin(nom)		50			
		110Vin(nom)		75			
Temperature coefficient				-0.02		+0.02	%/°C
Transient response recovery time	25% load step change				250		µs
Over voltage protection	Single Output	3.3Vout			3.9		VDC
			5Vout		6.2		
			12Vout		15		
			15Vout		18		
Over load protection	% of Iout rated				150		%
Short circuit protection				Continuous, automatics recovery			

GENERAL SPECIFICATIONS

GENERAL ELECTRICAL CHARACTERISTICS							
Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	DIP type	Input to Output	1600			VDC
			Input (Output) to Case	1600			
	SMD type	Input to Output	1600				
		Input (Output) to Case	1000				
Isolation resistance	500VDC			1			GΩ
Isolation capacitance						1500	pF
Switching frequency				270	300	330	kHz
Safety approvals	IEC /UL/ EN60950-1						UL:E193009 CB:UL(Demko)
Standard approvals	EN50155 EN45545-2						
Case material							Nickel-coated copper
Base material							Non-conductive black plastic
Potting material							Epoxy (UL94 V-0)
Weight							18g (0.62oz)
MTBF	MIL-HDBK-217F						2.832 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard	-40		+105	°C
	M3 Version	-55		+105	
	*Converter can meet the railway T2 and TX temperature requirement.				
	T2: -40 °C ~ +70 °C as all models; TX: -40 °C ~ +85 °C as power derating to 55% output power.				
Maximum case temperature				105	°C
Storage temperature range		-55		+125	°C
Thermal impedance	Natural convection		20		°C/W
Thermal shock					MIL-STD-810F
Shock				EN61373, MIL-STD-810F	
Vibration				EN61373, MIL-STD-810F	
Relative humidity				5% to 95% RH	

EMC SPECIFICATIONS


Parameter	Conditions		Level
EMI	EN55032, EN55011	With external components	Class A · Class B
ESD	EN61000-4-2	Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$	Perf. Criteria A
Radiated immunity	EN61000-4-3	20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	$\pm 2\text{kV}$	Perf. Criteria A
Surge	24Vin 48Vin	With an external input filter capacitor (Nippon chemi-con KY series, $220\mu\text{F}/100\text{V}$)	Perf. Criteria A
	110 Vin	With an external input filter capacitor (Nippon chemi-con KXJ series, $150\mu\text{F}/200\text{V}$)	
	EN61000-4-5	EN55024 $\pm 2\text{kV}$ and EN50155 $\pm 2\text{kV}$	
Conducted immunity	24Vin 48Vin	With an external input filter capacitor (Nippon chemi-con KY series, $220\mu\text{F}/100\text{V}$)	Perf. Criteria A
	110 Vin	With an external input filter capacitor (Nippon chemi-con KXJ series, $150\mu\text{F}/200\text{V}$)	
	EN61000-4-6	10 Vr.m.s	
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used


CHARACTERISTIC CURVE

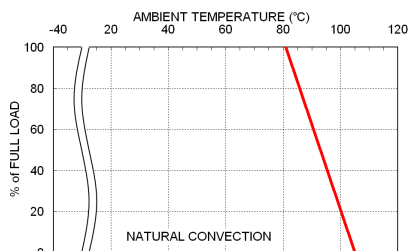

FKC08-48S05W Derating Curve

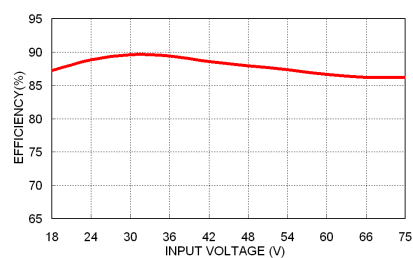

FKC08-48S05W Efficiency vs. Input Voltage

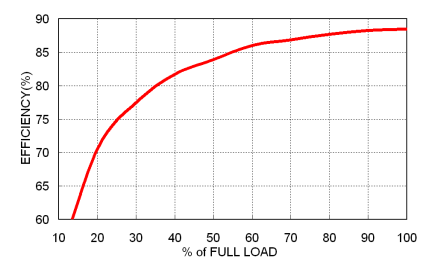

FKC08-48S05W Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
FKC08-24S□□W、FKC08-24D□□W	2	Slow-Blow
FKC08-48S□□W、FKC08-48D□□W	1	Slow-Blow
FKC08-110S□□W、FKC08-110D□□W	0.5	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING


DIP type

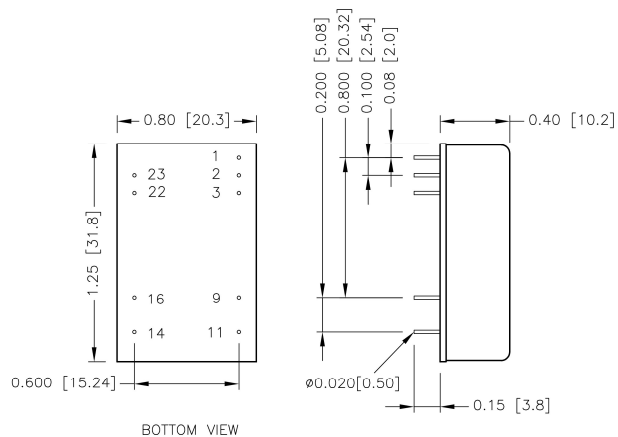

PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl	23	+Vin	+Vin
2	-Vin	-Vin	22	+Vin	+Vin
3	-Vin	-Vin			
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout

SMD type

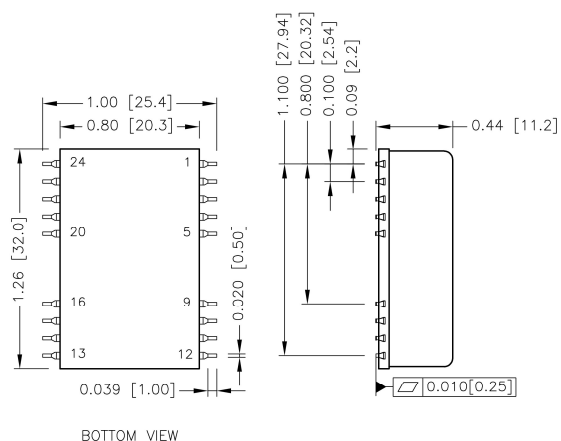


PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl	23	+Vin	+Vin
2	-Vin	-Vin	22	+Vin	+Vin
3	-Vin	-Vin			
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout
Others	NC	NC			

1. All dimensions in inch [mm]
2. Tolerance : x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]


RECOMMENDED PAD LAYOUT

DIP type



All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.9.11.14.16.22.23: $\Phi 0.031$ [0.80]
 Top view pad 1.2.3.9.11.14.16.22.23: $\Phi 0.039$ [1.00]
 Bottom view pad 1.2.3.9.11.14.16.22.23: $\Phi 0.063$ [1.60]

SMD type

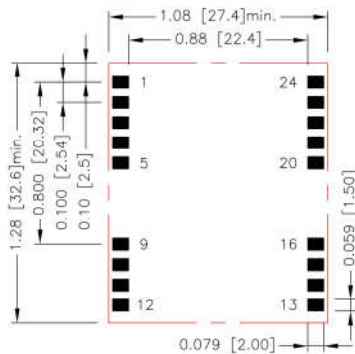

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Top view pad: 0.079x0.059 [2.00x1.50]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".


You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

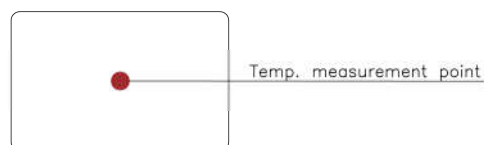

TOP VIEW

LEAD FREE REFLOW PROFILE For SMD Type

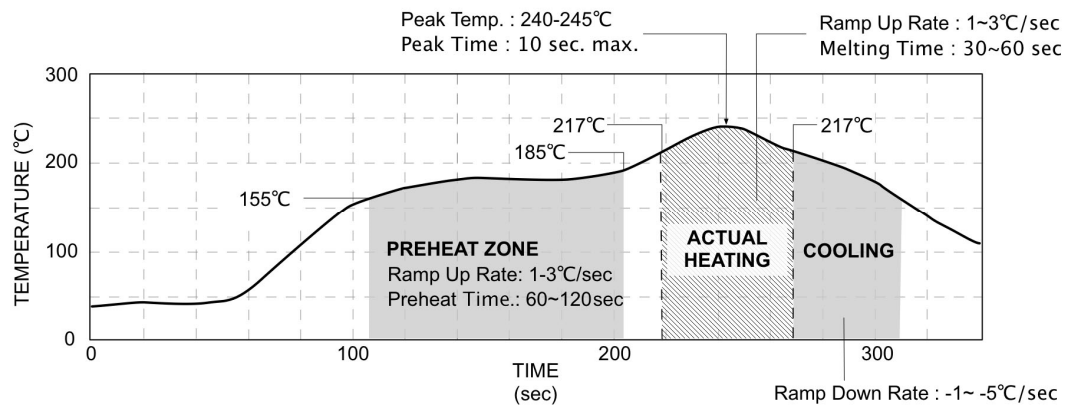

*The curves define the maximum peak reflow temperature permissible measured on pin1 or Vin pin.