



# P-DUKE POWER

## PSR1.0 Series


Non-Isolation DC-DC Converter

# 3

YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT

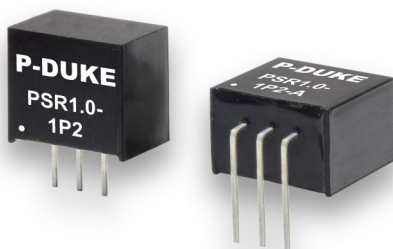

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

NON  
-isolation

LOW  
Standby  
Power

NO  
Min. Load  
Required

OCP

OTP

SCP

### PART NUMBER STRUCTURE

PSR1.0 -

Series Name

5P0

Output  
Voltage  
(VDC)

-

A

Mounting  
Options

1P2:1.2  
1P5:1.5  
1P8:1.8  
2P5:2.5  
3P3:3.3  
5P0:5.0  
6P5:6.5  
9P0:9.0  
012:12  
015:15

□:Vertical Mounting  
A:Horizontal Mounting

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Positive output application

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency		Maximum Capacitor Load
					Min. Vin	Max. Vin	
	VDC	VDC	A	mA	%		μF
PSR1.0-1P2	4.6 ~ 36	1.2	1	1.0	74	62	470
PSR1.0-1P5	4.6 ~ 36	1.5		1.0	78	65	
PSR1.0-1P8	4.6 ~ 36	1.8		1.0	82	69	
PSR1.0-2P5	4.6 ~ 36	2.5		1.0	87	75	
PSR1.0-3P3	4.75 ~ 36	3.3		2.0	91	78	
PSR1.0-5P0	6.5 ~ 36	5.0		1.0	94	84	
PSR1.0-6P5	9.0 ~ 36	6.5		1.0	93	87	
PSR1.0-9P0	12 ~ 36	9.0		1.0	95	90	
PSR1.0-012	15 ~ 36	12		1.0	95	92	
PSR1.0-015	18 ~ 36	15		1.0	96	94	

**INPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	With an external input capacitor C1 (22μF/50V) for input voltage > 32VDC. It allows the module operates from 32 to 36VDC.	4.6	9	36	VDC
	PSR1.0-1P2	4.6	9	36	
	PSR1.0-1P5	4.6	9	36	
	PSR1.0-1P8	4.6	9	36	
	PSR1.0-2P5	4.6	9	36	
	PSR1.0-3P3	4.75	9	36	
	PSR1.0-5P0	6.5	12	36	
	PSR1.0-6P5	9.0	12	36	
	PSR1.0-9P0	12	24	36	
	PSR1.0-012	15	24	36	
	PSR1.0-015	18	24	36	
Rise time	Time for Vout rises from 10% to 90% of Vout		2		ms
Input filter			Capacitor type		
Input reflected ripple current			150		mAp-p

**OUTPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-2.0		+2.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	10% to 100% of Full Load				
	Vertical mounting	1.2Vout, 1.5Vout		+0.6	%
	Horizontal mounting	1.2Vout, 1.5Vout, 1.8Vout		+1.2	
		Others		+0.4	
Ripple and noise	Measured by 20MHz bandwidth	Vout ≤ 6.5VDC Vout ≥ 9.0VDC	50 75		mVp-p
Temperature coefficient		-0.015		+0.015	%/°C
Dynamic load response	50% load step change	Peak deviation Recovery time	150 250		mV μs
Output start-up overshoot				+1	%
Over load protection			2.5		A
Short circuit protection			Continuous, automatic recovery		

## GENERAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching frequency		400	500	600	kHz
Design meet safety standard		IEC /UL/ EN60950-1			
Case material		Non-conducted black plastic			
Potting material		Silicone (UL94 V-0)			
Weight		1.9g (0.067oz)			
MTBF	MIL-HDBK-217F, Full load	2.571 x 10 <sup>7</sup> hrs			

## ENVIRONMENTAL SPECIFICATIONS





Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+100	°C
Over temperature protection	Internal IC junction		+150		°C
Storage temperature range		-55		+125	°C
Thermal shock		MIL-STD-810F			
Vibration		MIL-STD-810F			
Relative humidity		5% to 95% RH			

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.

## APPLICATION CIRCUIT

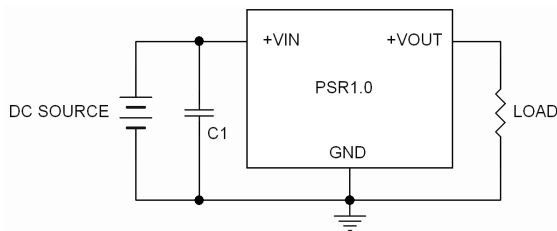

## CHARACTERISTIC CURVE

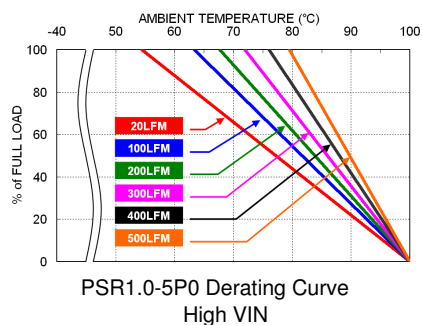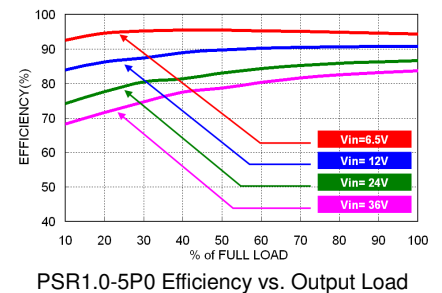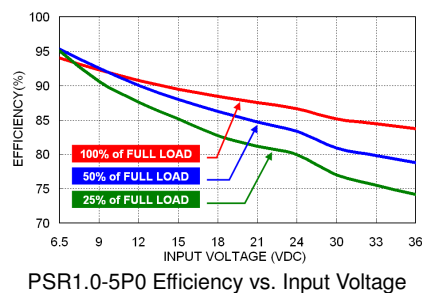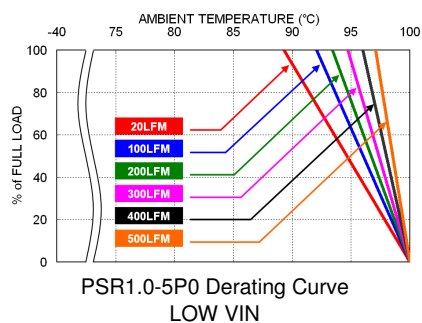

## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
PSR1.0-1P2	0.63	Slow-Blow
PSR1.0-1P5 、 PSR1.0-1P8	0.8	Slow-Blow
PSR1.0-2P5 、 PSR1.0-3P3 、 PSR1.0-6P5 、 PSR1.0-9P0	1.25	Slow-Blow
PSR1.0-5P0 、 PSR1.0-012 、 PSR1.0-015	1.6	Slow-Blow


The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

## MECHANICAL DRAWING

**Standard type:** Vertical mounting

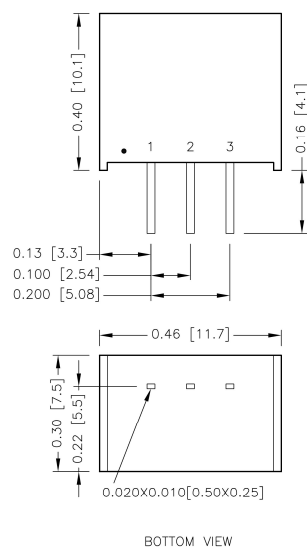

**Suffix-A:** Horizontal mounting

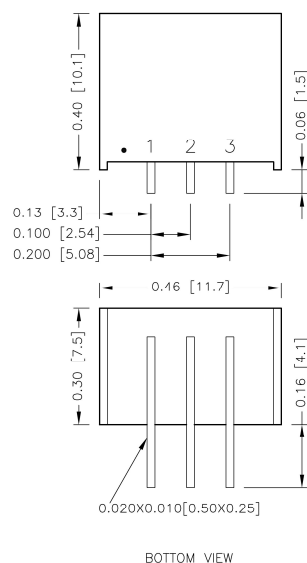


### PIN CONNECTION

PIN	DEFINE
1	+Vin
2	GND
3	+Vout


1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
3. Pin pitch tolerance ±0.01 [0.25]
4. Pin dimension tolerance ±0.004[0.10]

## RECOMMENDED PAD LAYOUT

**Standard type:** Vertical mounting



**Suffix-A:** Horizontal mounting



All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.3:  $\varnothing 0.031[0.80]$   
 Top view pad 1.2.3:  $\varnothing 0.039[1.00]$   
 Bottom view pad 1.2.3:  $\varnothing 0.063[1.60]$

## THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.

Proper cooling can be verified by measuring the point as the figure below.


The temperature at this location should not exceed 100°C.

When Operating, adequate cooling must be provided to maintain the test point temperature at or below 100°C.

Although the maximum point Temperature of the power modules is 100°C, you can limit this Temperature to a lower value for extremely high reliability.

The unit will shutdown if the internal IC junction exceeds 150°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating. The module will automatically restart after it cools down.

- Thermal test condition with vertical direction by natural convection (20LFM).

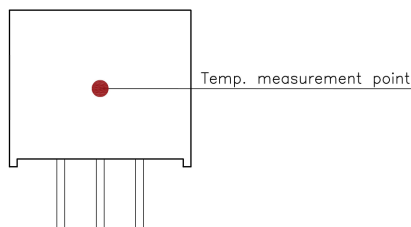

BACK VIEW